



FUEL MANAGEMENT SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

# SELF 2000 / SELF 3000

## FEATURES

- MANUAL
- VERSATILE
- HIGH EFFICIENCY
- LEVER PROTECTION

The PIUSI SELF 2000 / SELF 3000 manual nozzles perform the maximum efficiency thanks to the low-flow resistance and the wide range of applications including transfer systems run by gravity. They are supplied with removable lever protection and connectors.

### PERFORMANCE

UP TO

**150 L/MIN**

FLOW RATE

**25MM**

OD SPOUT

SELF 2000 / SELF 3000



SELF 2000 DIESEL



SELF 3000 DIESEL/GASOLINE



PLASTIC NOZZLE WATER/DIESEL



PLASTIC NOZZLE WATER/FOOD



### PACKAGING

| CODE      | WEIGHT |     | PACKAGING   |           |         | N. BOXES / EUROPALLET |  |
|-----------|--------|-----|-------------|-----------|---------|-----------------------|--|
|           | KG     | LBS | MM          | INCH      | PCS/BOX |                       |  |
| 00063900A | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| 00064900A | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| 00064902A | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| 00065001A | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| 00065600A | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| FO0641120 | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| FO0641130 | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| FO065000A | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| FO0650020 | 0,7    | 1,5 | 400X250X200 | 16X11X7,8 | 1       |                       |  |
| FO063000A | 0,3    | 0,7 | -           | -         | 1       |                       |  |



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

## CHART




## IN THE BOX

- SELF 2000/ SELF 3000 NOZZLE
- INSTRUCTION MANUAL

## DETAILS



## DIMENSIONS

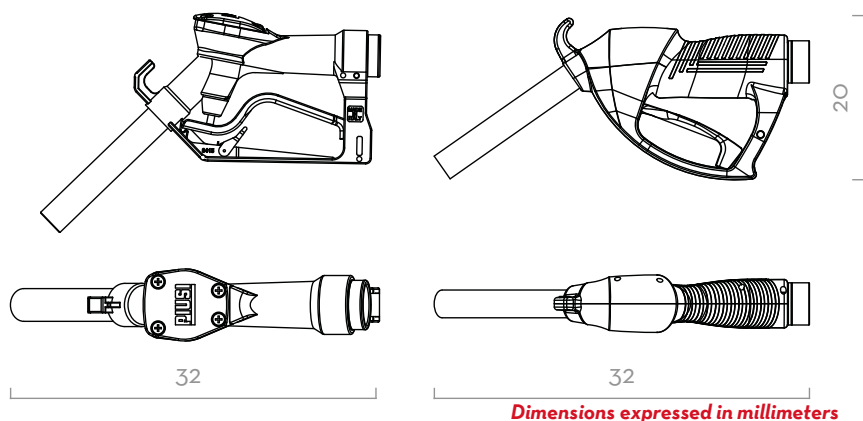

## MATERIALS

- BODY: ALUMINIUM
- SEAL: VITON

## TECHNICAL DATA

| CODE      | DESCRIPTION                            | FLUIDS TYPE | FLOW RATE |     | INLET  |          | SPOUT     |  |
|-----------|--|-------------|-----------|-----|--------|----------|-----------|--|
|           |  |             | L/MIN     | GPM | SWIVEL | Ø BSP    | EXT. Ø MM |  |
| 00063900A | SELF 2000 1" BSP UNLEADED              | B D G O     | 120       | 32  | FEMALE | 1" BSP   | 20        |  |
| 00064900A | SELF 2000 3/4" BSP                     | B D O       | 120       | 32  | FEMALE | 3/4" BSP | 25        |  |
| 00064902A | SELF 2000 3/4" BSP UNLEADED            | B D G O     | 120       | 32  | FEMALE | 3/4" BSP | 20        |  |
| 00065001A | SELF 3000 1" BSP UNLEADED              | B D O G     | 150       | 40  | FEMALE | 1" BSP   | 20        |  |
| 00065600A | SELF 2000 1" BSP SPOUT 25 MM           | B D O       | 120       | 32  | FEMALE | 1" BSP   | 25        |  |
| FO0641120 | SELF 2000 W/HOSE TAIL D.20 SPOUT 25 MM | B D O       | 120       | 32  | FEMALE | 3/4" BSP | 25        |  |
| FO0641130 | SELF 2000 1" BSP                       | B D O       | 120       | 32  | FEMALE | 1" BSP   | 25        |  |
| FO065000A | SELF 3000 1" BSP LEADED SPOUT          | B D O       | 150       | 40  | FEMALE | 1" BSP   | 25        |  |
| FO0650020 | SELF 3000 1" BSP LEADED SPOUT S/P      | B D G O W   | 150       | 40  | FEMALE | 1" BSP   | 25        |  |
| FO063000A | PLASTIC NOZZLE BLACK W/SWIVEL 1" BSP   | B D O W     | 80        | 21  | FEMALE | 1" BSP   | 34        |  |

# SELF 2000 / SELF 3000