


Part Number: C400A4401

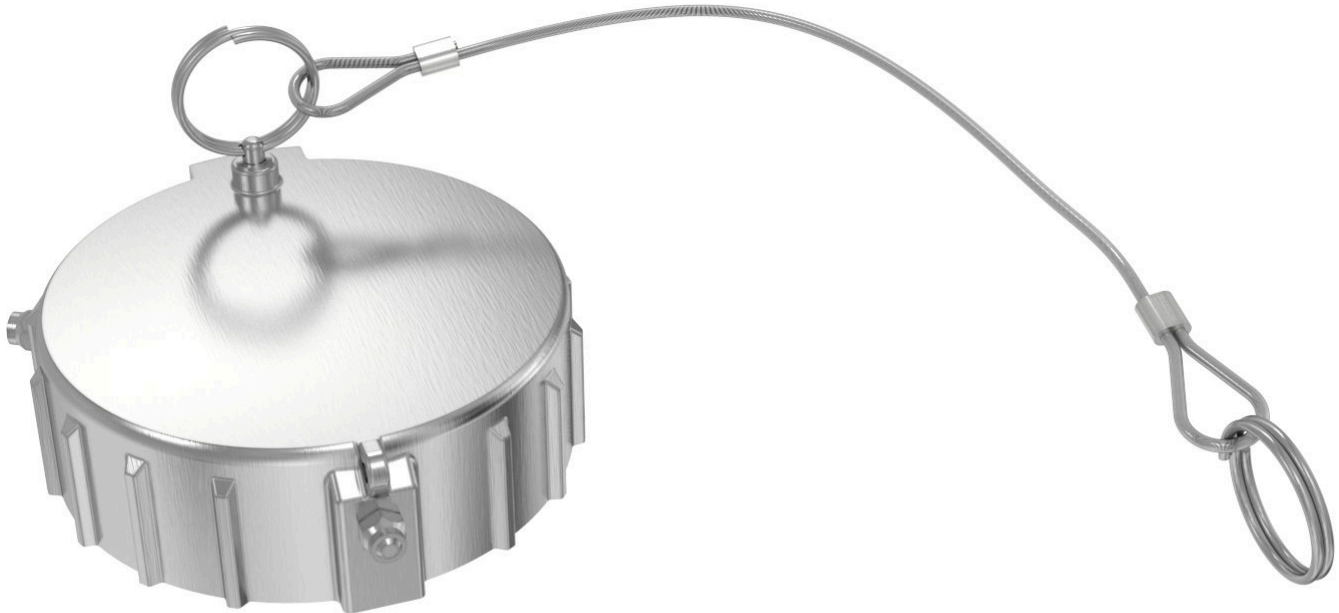

© Copyright Mann Teknik AB

<https://configurator.manntek.se/DDC/ACC/4/C44/Product5.html>

Product Group

Dry Disconnect Couplings

Quick and safe connection of hose assemblies and loading arms to mobile and stationary tanks, under pressure and with minimised liquid loss.

The standardised interface to STANAG 3756 with its bayonet coupling principle has been widely accepted in the industry. Both coupling parts are equipped with a flat poppet valve.

For the connection, the hose unit is pushed onto the tank unit and coupled / sealed by turning the coupler clockwise by 15 degrees. When the unit is turned by 100 degrees, the valves move into the tank unit so that the medium can flow. When a similar turn is made counter-clockwise, the flow is stopped and the coupler can be pulled off.

Certificates: DDC couplings fulfill the requirements of European Pressure Equipment Directive category 2 (for higher demand on request).

They are suitable for the use in potentially explosive atmosphere (ATEX) zone 1, approved for the transport of dangerous goods on road (ADR), by rail (RID) and by ship (IMDG), specified as a branch standard from European Chemical Industry (CEFIC) for handling of Ethylene Oxide/Propylene Oxide, Acrylic Monomers, Acrylonitrile, polymeric MDI/TDI and Vinyl Chloride.

TÜV TÜ.AGG 304-99, APRAGAZ File ref. 0302/P5832, Lloyd's Register 0038/ATEX/HAM064017,

TDT-UW-21/16, EAC TC No. RU Д-SE.МЮ62.В.02151

Type of Coupling

Caps and Plugs

Socket Diameter /
Nominal Diameter

3" (Ø 119 mm)

Accessories

Dust Cap - SS (Stainless Steel)

Protect the couplings against the ingress of dirt and water and increase product lifetime.

The cap features a safeguard against inadvertent release: before removing the cap, a spring-loaded locking pin is pulled.



Contact Data:

Mann Teknik AB
Strandvägen 16
SE-542 31 Mariestad / Sweden
Telefon: +46 501 39 32 00
Telefax: +46 501 39 32 09
E-Mail: sales@manntek.se
Internet: <http://www.manntek.se>