



CAR FILLING



FUEL MANAGEMENT SYSTEMS



KITS



PUMPS



METERS



METERED NOZZLES

DELPHIN PRO IBC

FEATURES

- FULLY AUTOMATIC
- 100% COMPATIBLE WITH ALL CARS AND VEHICLES**
- STURDY DESIGN
- EASY TO INSTALL
- FLOW RATE REGULATOR
- SPECIFICALLY DESIGN FOR IBC TANKS

DELPHIN PRO IBC is a compact and professional solution for an AdBlue® car filling fixed installation. It benefits from all the features of Delphin Pro AC while being suitable for all situations with a higher consumption of AdBlue®. It is designed to be hung on IBC tanks guaranteeing maximum security and reliability thanks to the lock bracket system. The integrated handle allows a safe and easy lifting. The flat bottom allows to place DELPHIN PRO IBC firmly on the floor during the IBC tank replacement or any other operation.

PERFORMANCE

2-11 L/MIN

FLOW RATE

AC
VOLTAGE
POWER

6M

HOSE LENGTH

AVAILABLE WITH
ON/OFF
BUTTON
SWITCH



DELPHIN PRO IBC



PACKAGING

| CODE | WEIGHT | | PACKAGING | | |
|-----------|--------|------|-------------|----------------|---------|
| | KG | LBS | MM | INCH | PCS/BOX |
| FO0100BOA | 24 | 52,9 | 500X340X590 | 19,7X13,4X23,2 | 1 |
| FO0100B2A | 24 | 52,9 | 500X340X590 | 19,7X13,4X23,2 | 1 |



NOZZLES



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

FUNCTIONING

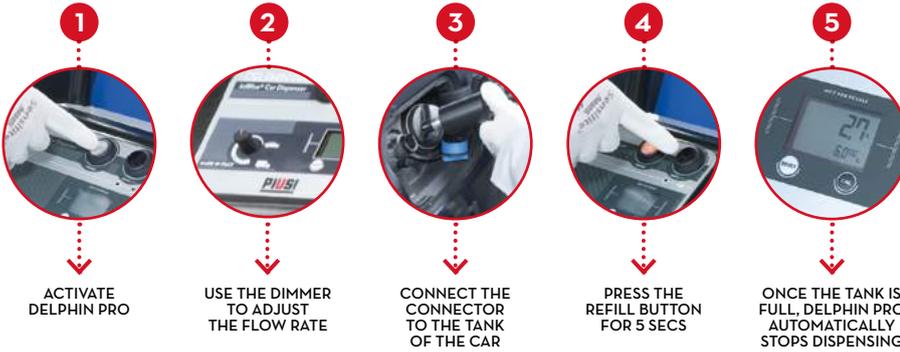

IN THE BOX

- DELPHIN PRO IBC UNIT
- AF2 / SEC CONNECTOR
- INSTRUCTION MANUAL

DETAILS



UNIVERSAL ISO CONNECTOR



AF2 CONNECTOR INCLUDED




SEC VERSION INCLUDED



DIGITAL FLOW METER

DIMENSIONS

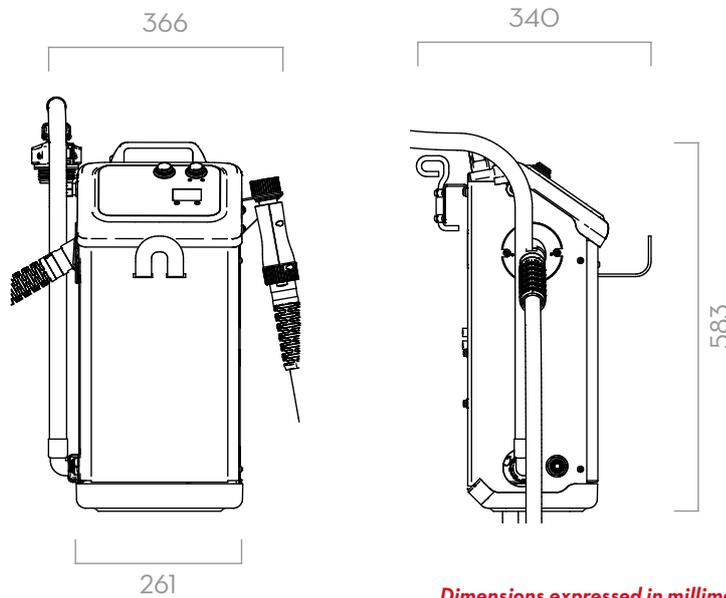

Dimensions expressed in millimeters

MATERIALS

- PUMP:
- BODY: POLIPROPYLENE
- DIAPHRAGM: POLIPROPYLENE

TECHNICAL DATA

| CODE | DESCRIPTION | FLUIDS TYPE | FLOW RATE | | VOLTAGE | | | HOSE | | ON/OFF |
|-----------|--|-------------|-----------|-----------|---------|------------|-----------|------------|--------|--------|
| | | | L/MIN | GPM | AC V/HZ | POWER WATT | AMP. MAX. | LENGHT (M) | Ø (MM) | SWITCH |
| FO0100BOA | DELPHIN PRO IBC AF2-SEC 230V/50HZ | | 2 - 11 | 0,5 - 2,9 | 230/50 | 400 | 1,95 | 3 | 19 | YES |
| FO0100B2A | DELPHIN PRO IBC AF2-SEC 230V/50HZ 6 MT | | 2 - 11 | 0,5 - 2,9 | 230/50 | 400 | 1,95 | 6 | 19 | YES |

**IN ACCORDANCE TO ISO/FDIS 22241-4:2009

DELPHIN PRO IBC