


PECO Series PEPP/PEPS

GRITGARD™
 PLEATED STYLE
 DRY GAS CARTRIDGES

for use in PECO Series 30 Vessels

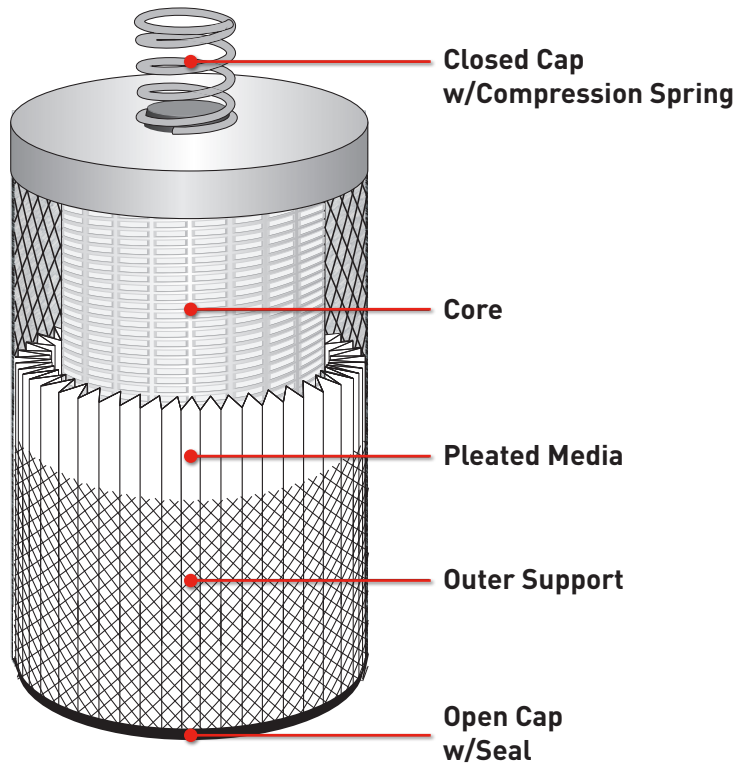

Designed for installation in PECO Series 30 inline gas filter vessels, GritGard Series PEPP & PEPS cartridges remove dust, scale, rust, sand and other rigid particulates from small volume air and gas streams. Featuring your choice of durable synthetic or economical cellulose filter media, GritGard cartridges offer flexibility to meet your application needs. Synthetic media offers a high level of protection against erosive contaminants, provides longer service life and performs with absolute efficiency. Cellulose media offers nominal efficiency at an economical price. All models are configured with a single open end and robust compression spring ensuring a tight seal that won't bypass contaminants.

NOMINAL DIMENSIONS

MODEL	O.D.	I.D.	LENGTH
PEPP 6-3.12	6.0" / 152mm	3.5" / 89mm	3.12" / 79mm
PEPP 6-7.81	6.0" / 152mm	3.5" / 89mm	7.81" / 198mm
PEPS 6-3.12	6.0" / 152mm	3.5" / 89mm	3.12" / 79mm
PEPS 6-7.81	6.0" / 152mm	3.5" / 89mm	7.81" / 198mm

MATERIALS

MEDIA	Pleated-Polyester or Cellulose
CORE	Plated Steel
OUTER SUPPORT	PET Netting
END CAPS	Plated Steel
SPRING	Steel
SEAL	Buna-N, Viton®
ADHESIVE	Urethane

PERFORMANCE

EFFICIENCY:

PEPP: 98%

PEPS: 99.98%

OPERATING DATA

FLOW DIRECTION: Outside-to-Inside


MAX TEMP: 240°F / 116°C

MAX. DIFFERENTIAL PRESSURE: 50 psid / 3.4 bar


RECOMMENDED CHANGE-OUT

DIFFERENTIAL PRESSURE: 12–15 psi / 0.8–1.0 bar

ORDERING INFORMATION - CELLULOSE

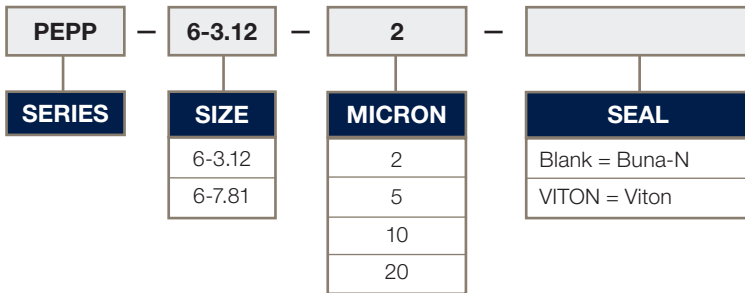

ORDERING INFORMATION - POLYESTER

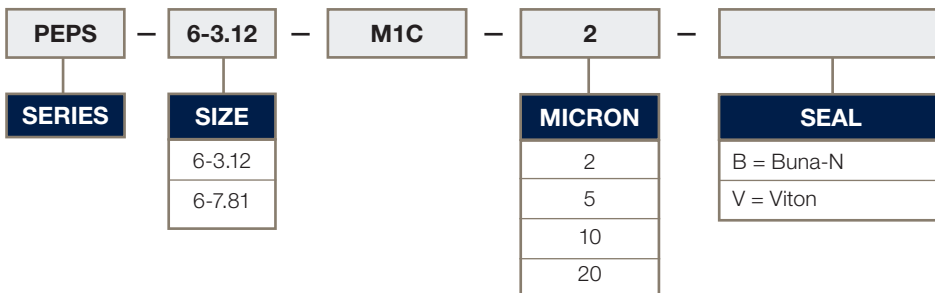

• Viton® is a registered trademarks of E. I. du Pont de Numours and Company.

© 2019 Parker Hannifin Corporation
DS-OG-GRITGARD-PEPP/PEPS-191118



Parker Hannifin Corporation
Industrial Process Filtration Division
 PO Box 640 | Mineral Wells, TX 76068
 Phone 940-325-2575 | Toll Free 1-800-877-7326
 Email IPF_AM_TechSupport@parker.com
 www.parker.com/ipf