



CAR FILLING

FUEL MANAGEMENT
SYSTEMS

KITS



PUMPS



METERS



METERED NOZZLES

PIUSIBOX FOR ADBLUE®

FEATURES

- PORTABLE
- EASY TO HANDLE
- READY TO USE
- SEC CONNECTION ADAPTER
- DESIGNED FOR HEAVY DUTY APPLICATIONS

PERFORMANCE

UP TO

35 L/MIN

FLOW RATE

DC

VOLTAGE

POWER

20 MIN

DUTY CYCLE



PIUSIBOX FOR ADBLUE®



PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FO0204060	16	35,3	650X400X450	25,6X15X17,7	1



NOZZLES



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

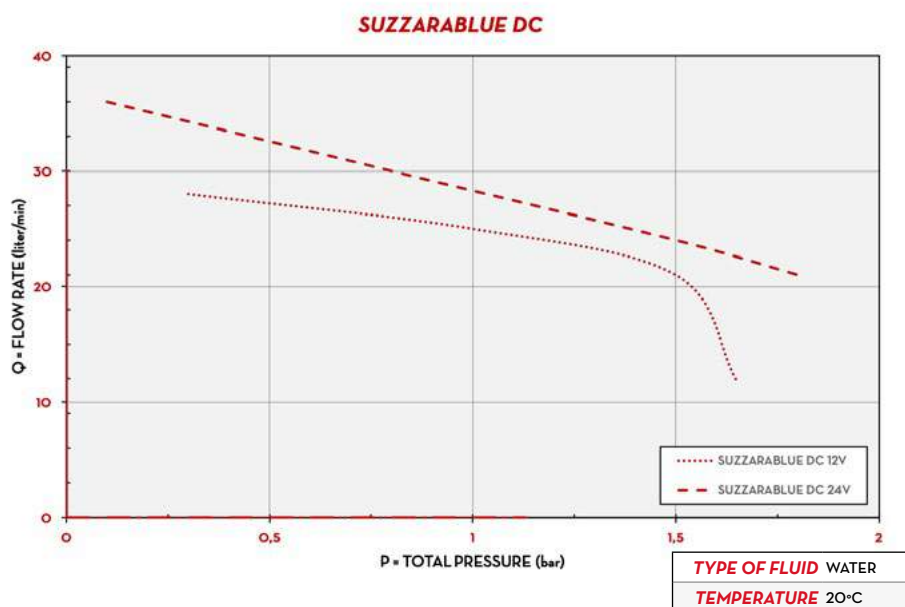

DIMENSIONS

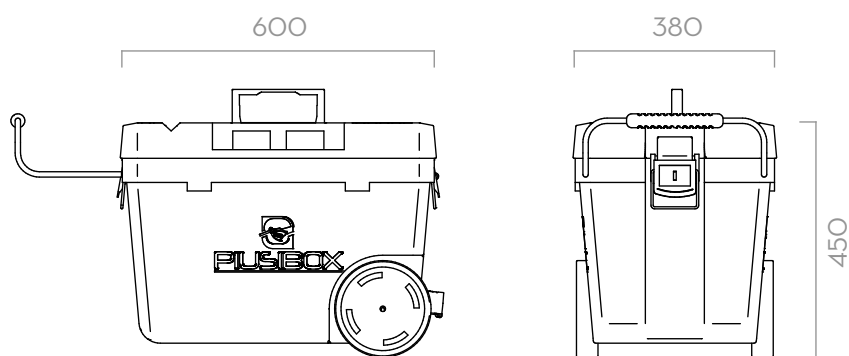

Dimensions expressed in millimeters

IN THE BOX

- SUZZARABLU PUMP DC
- AUTOMATIC NOZZLE
- SUCTION / DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS



NOZZLE



SEC CONNECTOR INCLUDED



WHEELS

COMPONENTS

- PUMP:
SUZZARABLU PUMP DC PAG. 70
- NOZZLE:
SB325_X PAG. 114

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			RPM	DUTY CYCLE	CABLE	NOZZLE	DELIVERY HOSE	SEC	GLOVES
			L/MIN	GPM	AC V/HZ	POWER WATT	AMP. MAX.	RPM	MIN.		TYPE	LENGHT		
FO0204060	PIUSIBOX FOR ADBLUE		35	9,2	24	310	13	2800	20	YES	SB325	6 M	YES	YES

PIUSIBOX FOR ADBLUE®

MOBILE

61