











REMOTE DISPLAY

FEATURES

- · LARGE SCREEN DISPLAY
- NON RESETTABLE TOTAL
- STANDARD BATTERY

REMOTE DISPLAY for remote control (via max. 15 m. cable) of pulse meters. The large screen displays the quantity delivered and the non resettable total Equipped with software applications for calibrating meters. Available as both basic display device and as pulse emitter. Indispensable for receivers designed to recognise only discreet quantities of impulses. The easy interfacing management systems of the pulse transmitter models extend the field of application of pulse meters combined with remote displays.

PERFORMANCE

PULSE METER

COMPATIBILITY

UP TO
100
PULSES/LITER
FLOW RATE





REMOTE DISPLAY

PACKAGING									
CODE	WEIGHT		PACKAGING						
	KG	LBS	ММ	INCH	PCS/BOX				
FOO49502A	1,2	2,6	200X120X140	8,9X4,9X5,9	1				
FOO495O3B	1,2	2,6	225X125X15O	8,9X4,9X5,9	1				







TANK MONITORING







ACCESSORIES MERCHANDISE

INDEX



























FUNCTIONING







IN THE BOX


- REMOTE DISPLAY
- BRACKET
- INSTRUCTION MANUAL

DETAILS





DIMENSIONS

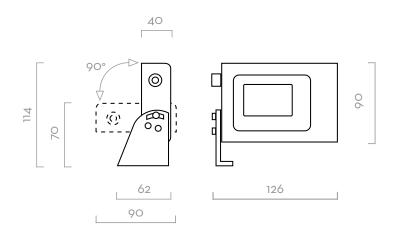

Dimensions expressed in millimeters

TECHNICAL DATA							
CODE	DESCRIPTION	FLUIDS TYPE	FLANGE	INLET OUTLET			
F0049502A	DISPLAY PULSE IN	(A) (W)	FOR ALL PIUSI PULSE OUT REMOTE DISPLAY	PULSE IN			
F0049503B	DISPLAY PULSE OUT ADBLUE®	(A) (W)	TURBINOX / K24 PULSER	PULSE OUT			