

SQUALO35 / SUBLOCK

FEATURES

- **HEAVY DUTY**
- **REGENERATIVE TURBINE**
- **INTEGRATED PRESSURE REGULATOR**
- **BUILT-IN NON RETURN VALVE**

SQUALO35 is the first submersible pump for AdBlue® to have been especially developed and tested for distribution systems. A centrifugal pump fitted with a turbine regenerator with non-return valve and a built-in innovative pressure regulation system that optimises flow rate performance levels. Consistent flow rate and accuracy during delivery dramatically reduce energy consumption levels. The compact size and special pump design make for easy installation and near complete emptying of the intended installation tank.

SUBLOCK is guaranteed IP55 on the top and is made of advanced technopolymer, with the exception for other parts that need extra robustness that are stainless steel. It integrates an anti-syphon system.

Moreover, it represents the safest way to fix the SQUALO35 pump and related items to the tank. A practical pump hanging system that helps to prevent any transport damage to the tank, as it avoids impacts caused by movements or vibrations.

It has been engineered to be fully compatible with most tanks available on the market.

PERFORMANCE

UP TO 35 L/MIN FLOW RATE	AC VOLTAGE POWER
30 MM DEAD LEVEL	


SUBLOCK **NEW**

Junction Cap for hose and cables
SQUALO35-on-tank connection:

- delivery hose
- power
- level indicator
- flow meter



SUBLOCK

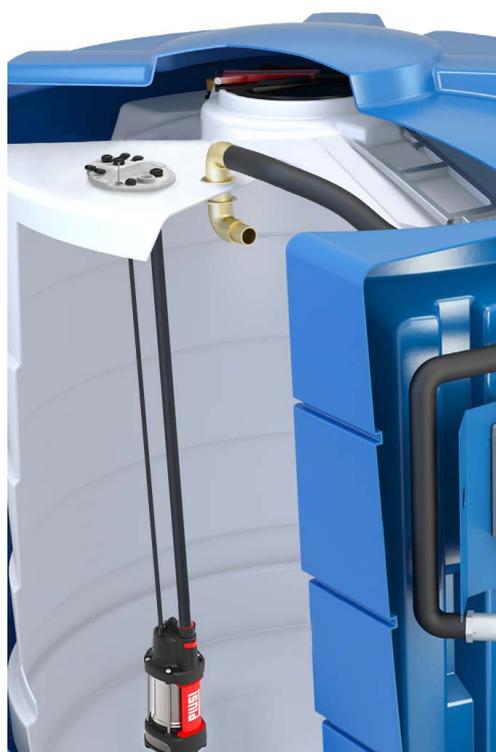

SQUALO35




PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PEZZI/BOX
FOO206020	7	15,4	510X240X150	20X9,4X5,6	1
FOO206A00	8,5	18,7	400X290X250	15,7X11,4X9,8	1




CHART

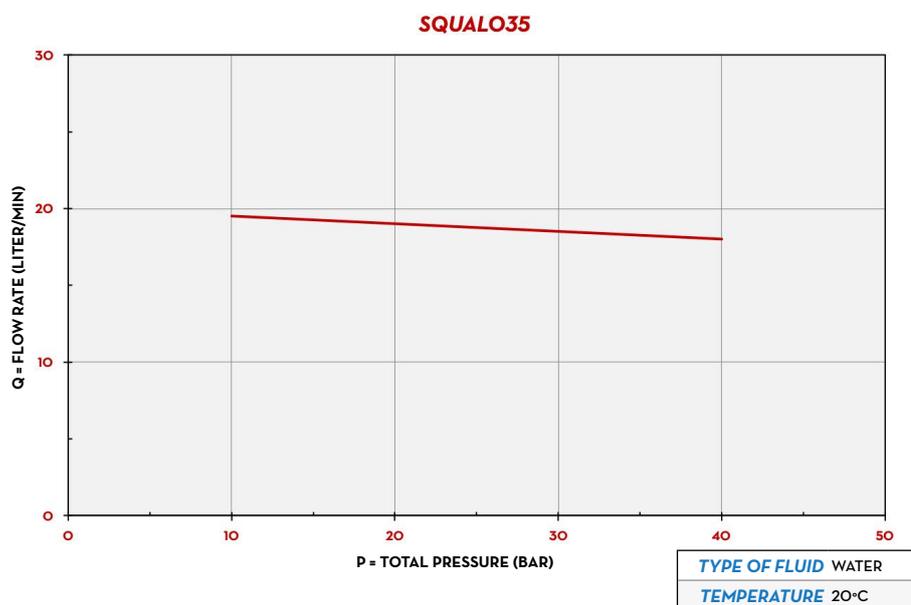

IN THE BOX

- SQUALO35
- KIT SQUALO35 SUBLOCK
- INSTRUCTION MANUAL

DIMENSIONS

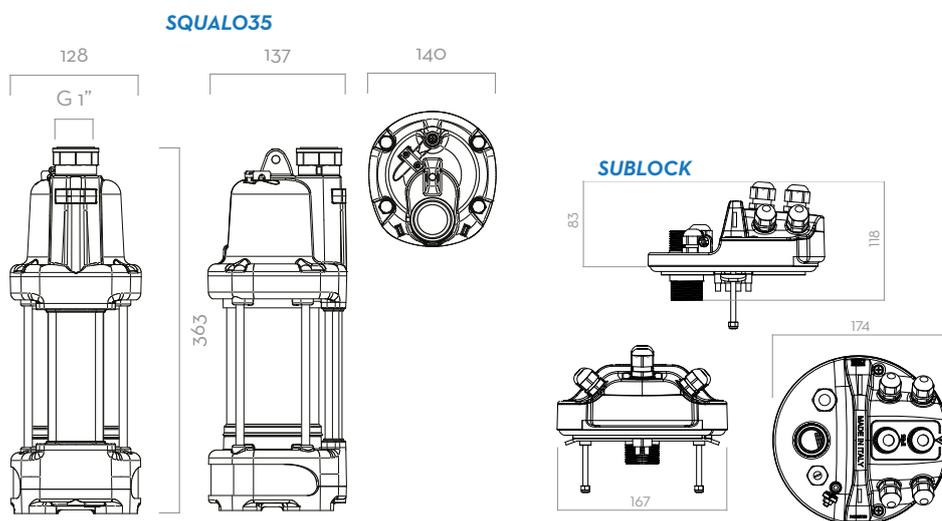

Dimensions expressed in millimeters

DETAILS



MATERIALS

- BODY: STAINLESS STEEL/TECHNOPOLYMER
- TURBINE: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	WORKING PRESSURE	FLOW RATE		VOLTAGE		DEAD LEVEL	POWER CORD LENGTH
				L/MIN	GPM	AC V/HZ DC V	WATT		
FOO206020	SQUALO35 230/50 TIMER		1,8 BAR 27 PSI	35	7,7	230/50	560	30 MM	5 M
NEW FOO206A00	KIT SQUALO35 SUBLOCK 230/50-60HZ TIMER		1,8 BAR 27 PSI	35	7,7	230/50	560	30 MM	5 M