

DIESEL EXHAUST FLUID DISPENSER FILTER


Cim-Tek® Filtration understands that diesel exhaust fluid (DEF) is a key ingredient for allowing the selective catalytic reduction (SCR) system to reduce emission pollutants such as NOx (nitrogen oxides). In response to truck regulations for SCR systems, we have developed D.E.F.-TEK® filters for particulate and crystal removal from DEF fluid at the dispenser to ensure SCR systems function properly.

- Filter removes particulates & crystalized urea from DEF fluid (Available in 1 and 5 micron filtration)
- Ultra-clean DEF fluid is critical in making the SCR system and dosing valve function properly
- Filter housings manufactured of heavy duty 304 stainless steel
- 150 PSI (10.3 BAR) operating pressure
- All materials compatible with DEF



DIESEL EXHAUST FLUID DISPENSER FILTER HOUSING PART # 41060

SPECIALLY DESIGNED STAINLESS STEEL FILTER HOUSING WITH EPDM GASKETS
150 PSI (10.3 BAR) MAX WORKING PRESSURE
1" NPT INLET/OUTLET
4 1/4" WIDE
13 1/4" LENGTH FROM TOP TO BOTTOM
1 PER CARTON
FILTER CARTRIDGE NOT INCLUDED

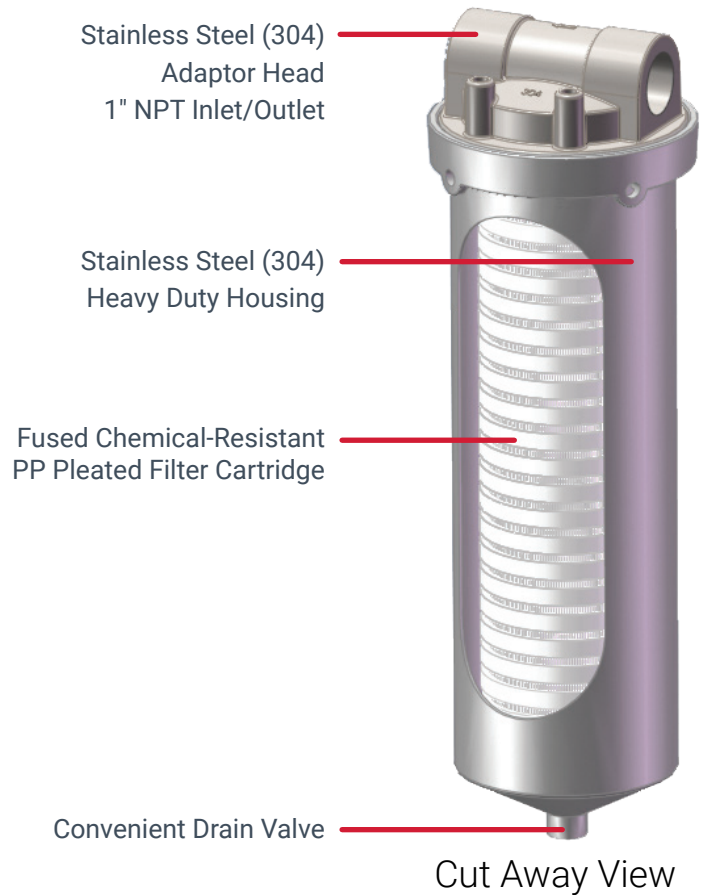

DIESEL EXHAUST FLUID DISPENSER FILTER CARTRIDGE

PART # 31011 - 1 MICRON
PART # 31015 - 5 MICRON
FUSED CHEMICAL-RESISTANT PP PLEATED FILTER CARTRIDGE, EPDM GASKETS
4 PER CARTON

MADE IN CHINA
NOT FOR USE WITH AVIATION APPLICATIONS
HOUSING AND CARTRIDGES NOT FOR USE WITH PETROLEUM PRODUCTS (GASOLINE, DIESEL, ETC.)